




UNDERHUNG - SINGLE GIRDER

**Capacities to 10 tons.
Spans to 75 feet.**

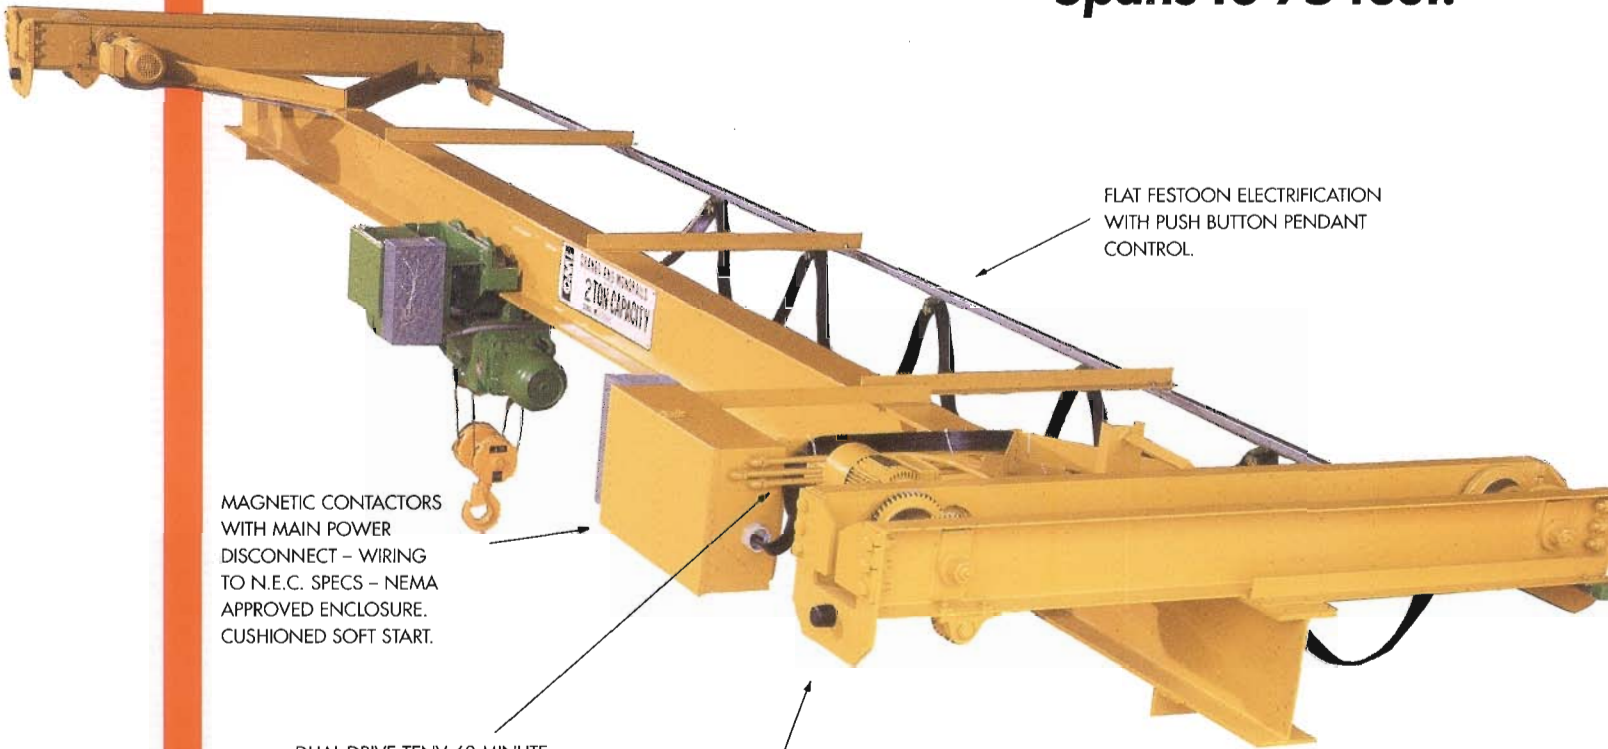

MAGNETIC CONTACTORS WITH MAIN POWER DISCONNECT - WIRING TO N.E.C. SPECS - NEMA APPROVED ENCLOSURE. CUSHIONED SOFT START.

DUAL DRIVE TENV 60 MINUTE SQUIRREL CAGE MOTORS - DISC BRAKES PROVIDE SMOOTH POSITIVE STOPPING POWER.

OPEN GEAR DESIGN OF HARDENED STEEL FOR LONGER WEAR AND LESS MAINTENANCE.

FLAT FESTOON ELECTRIFICATION WITH PUSH BUTTON PENDANT CONTROL.

OMI Cranes are designed to meet your particular lifting tasks. Computer aided designs insure that all cranes meet or exceed C.M.A.A. specifications. OMI Cranes are safe, reliable, rugged, and require minimum maintenance.



Easylift 
SYSTEMS INCORPORATED

8121 Saddleback Place
Maineville, OH 45039-9507

Phone: 513-677-1770
Fax: 513-677-1299
Email: easylift@zoomtown.com
www.easyliftmaterialhandling.com